



带橡胶附件输送链 Conveyor Chains With Rubber Top

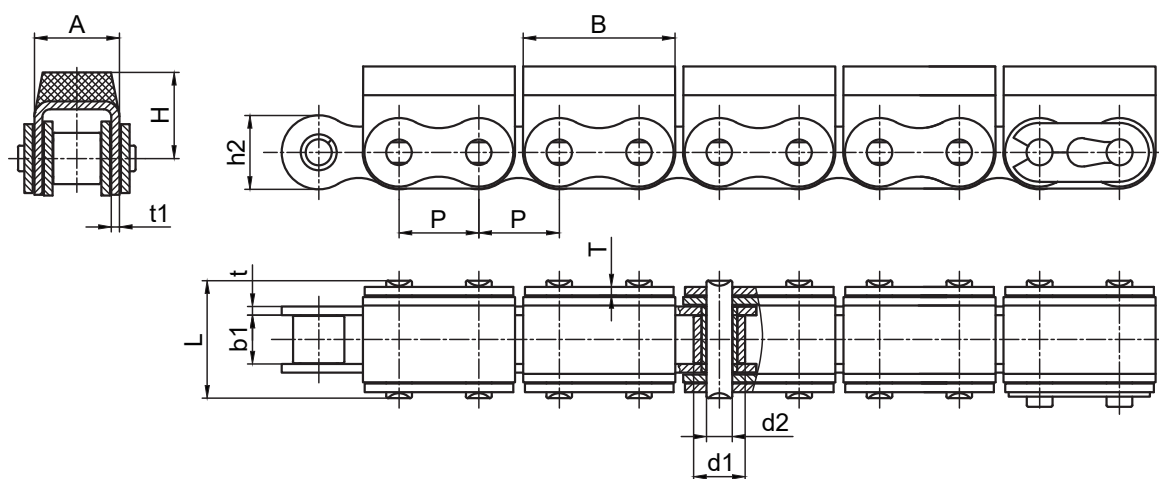

征和链号 CHOHO Chain No.	节距	滚子直径	内节内宽	销轴直径	销轴长度	链板厚度	链板高度	附板尺寸				抗拉强度	每米重量
	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length	Plate thickness	plate depth	Attachment dimensions				Ultimate tensile strength	Weight per meter
	P	d1 max	b1 min	d2 max	L max	t/T max	h2 max	A	B	H	t1	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
08B-G1	12.700	8.51	7.75	4.45	20.0	1.56	11.80	14.60	24.20	12.3	1.60	18.0	1.19
50-G1	15.875	10.16	9.40	5.08	24.5	2.00	15.09	17.50	31.00	17.0	1.60	21.8	1.70
10B-G1	15.875	10.16	9.65	5.08	23.2	1.70	14.70	16.80	30.00	17.0	1.60	19.0	1.62
60-G1	19.050	11.91	12.57	5.94	29.9	2.42	18.00	21.40	37.05	21.0	1.85	31.8	2.55
12B-G1	19.050	12.07	11.68	5.72	26.5	1.85	16.00	19.60	36.00	21.0	1.85	29.0	2.01
80-G1	25.400	15.88	15.75	7.92	37.2	3.10	24.00	27.50	46.00	20.0	2.42	42.0	3.97
100-G1	31.750	19.05	18.90	9.53	46.8	4.00	30.00	34.00	57.60	28.0	3.10	86.7	6.15
20B-G1	31.750	19.05	19.56	10.19	48.0	4.5/3.5	26.40	36.00	57.00	27.0	3.50	85.0	6.19
24B-G1	38.100	25.40	25.40	14.63	61.6	6.0/4.8	33.20	47.00	72.60	34.0	4.50	160.0	11.25

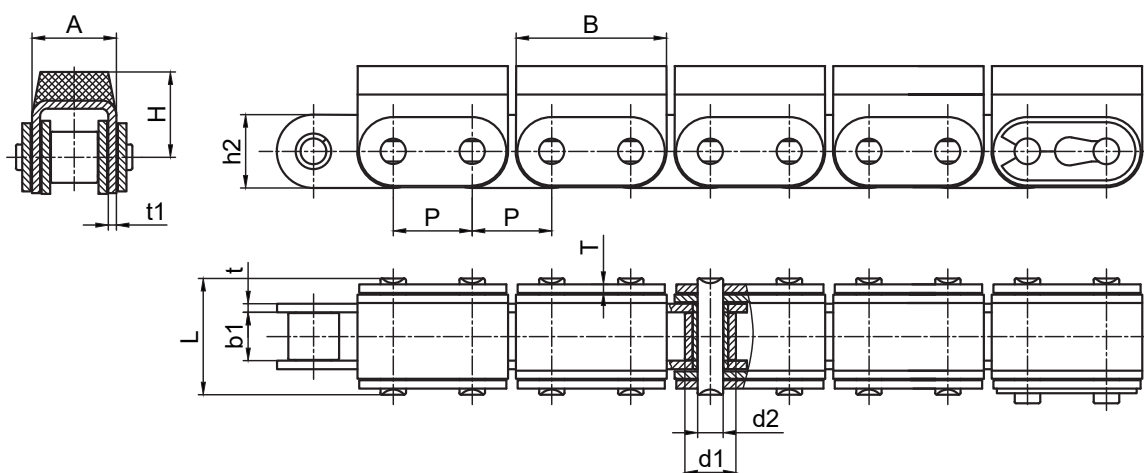

征和链号 CHOHO Chain No.	节距	滚子直径	内节内宽	销轴直径	销轴长度	链板厚度	链板高度	附板尺寸				抗拉强度	每米重量
	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length	Plate thickness	plate depth	Attachment dimensions				Ultimate tensile strength	Weight per meter
	P	d1 max	b1 min	d2 max	L max	t/T max	h2 max	A	B	H	t1	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
C08B-G1	12.700	8.51	7.75	4.45	20.0	1.56	11.80	14.60	24.20	12.3	1.60	18.0	1.30
C10B-G1	15.875	10.16	9.65	5.08	23.2	1.70	14.70	16.80	30.00	17.0	1.60	19.0	1.75
C12B-G1	19.050	12.07	11.68	5.72	26.5	1.85	16.00	19.60	36.00	21.0	1.85	29.0	2.15
C80-G1	25.400	15.88	15.75	7.92	37.2	3.10	24.00	27.50	46.00	20.0	2.42	42.0	4.34
C100-G1	31.750	19.05	18.90	9.53	46.8	4.00	30.00	34.00	61.75	28.0	3.10	86.7	9.10
C20B-G1	31.750	19.05	19.56	10.19	48.0	4.5/3.5	26.40	36.00	57.00	27.0	3.50	85.0	6.65
C24B-G1	38.100	25.40	25.40	14.63	61.6	6.0/4.8	33.20	47.00	72.60	34.0	4.50	160.0	11.63

输送带
Conveyor Chains

曳引链
Leaf Chains

传动链
Driving Chains

键槽和螺纹
Keyway And Thread

A系列滚子链轮
Sprocket A-Series


B系列滚子链轮
Sprocket B-Series

双节距链轮
Double Pitch Sprocket


双驱动链轮
Double-Drive Sprocket

同步带轮
Synchronous Pulley

带橡胶附件输送链 Conveyor Chains With Rubber Top

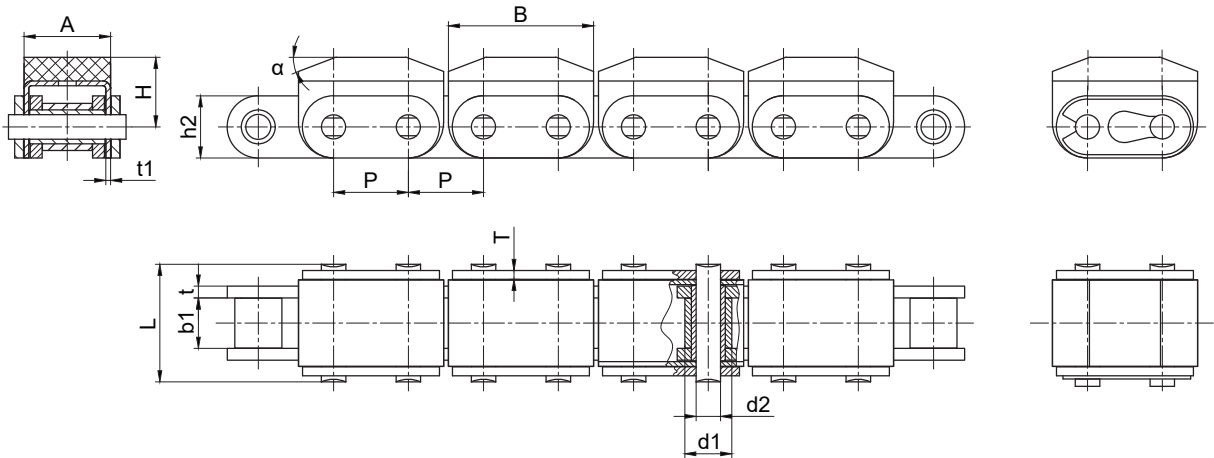

征和链号 CHOHO Chain No.	节距	滚子直径	内节内宽	销轴直径	销轴长度	链板厚度	链板高度	附板尺寸					抗拉强度	每米重量
	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length	Plate thickness	plate depth	Attachment dimensions					Ultimate tensile strength	Weight per meter
	p	d1 max	b1 min	d2 max	L max	t/T max	h2 max	A	B	H	t1	α	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	°	kN	kg/m
C16B-G1	25.400	15.88	17.02	8.28	39.7	4.0/3.0	21.00	29.05	49.00	21.4	1.60	15.00	70.6	1.30

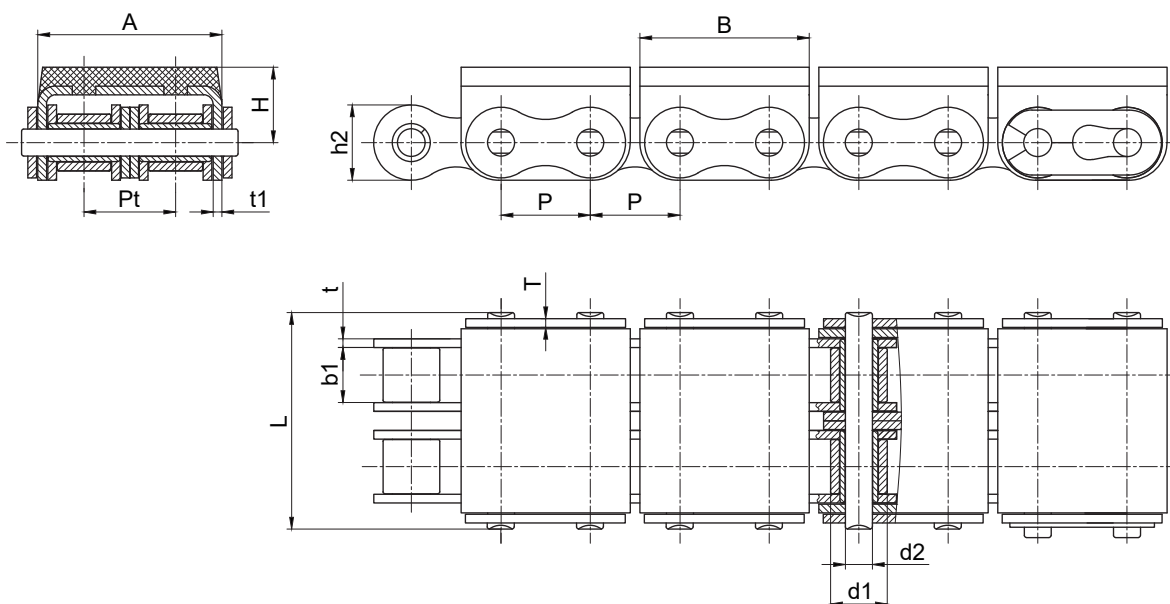

征和链号 CHOHO Chain No.	节距	排距	滚子直径	内节内宽	销轴直径	销轴长度	链板厚度	链板高度	附板尺寸				抗拉强度	每米重量
	Pitch	Transverse pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length	Plate thickness	plate depth	Attachment dimensions				Ultimate tensile strength	Weight per meter
	P	Pt	d1 max	b1 min	d2 max	L max	t/T max	h2 max	A	B	H	t1	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
08B-G2	12.700	13.92	8.51	7.75	4.45	34.30	1.56	11.80	28.40	24.20	12.30	1.56	32.0	2.07
10B-G2	15.875	16.59	10.16	9.65	5.07	39.70	1.70	14.70	33.30	30.00	17.00	1.56	44.5	2.56
12B-G2	19.050	19.46	12.07	11.68	5.72	46.00	1.85	16.00	39.10	36.00	16.00	1.85	57.8	3.21
60-G2	19.050	22.78	11.91	12.57	5.94	52.90	2.42	18.00	44.50	37.05	21.00	1.85	62.3	4.25
80-G2	25.400	29.29	15.88	15.75	7.92	68.00	3.10	24.00	57.20	46.00	20.00	2.42	84.0	7.27

输送机
Conveyor Chains

曳引链
Leaf Chains

传动链
Driving Chains

键槽和螺纹
Keyway And Thread

A系列滚子链轮
Sprocket A-Series

B系列滚子链轮
Sprocket B-Series

双节距链轮
Double Pitch Sprocket

双驱动链轮
Double-Drive Sprocket

同步带轮
Synchronous Pulley