

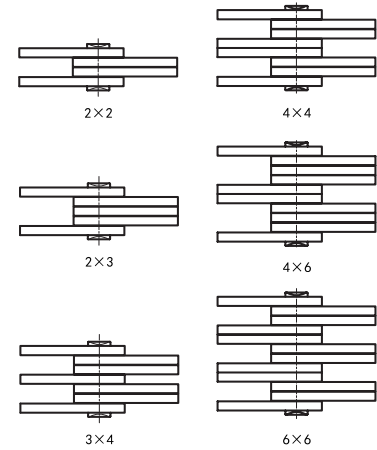
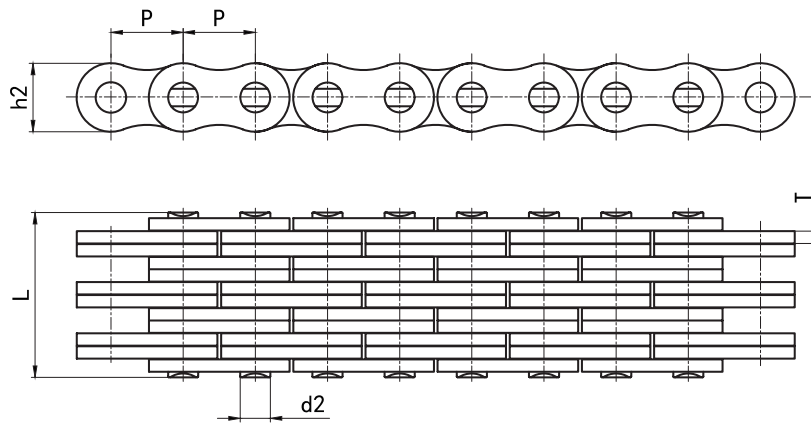


## 重型板式链条 Leaf Chains (Series BL)

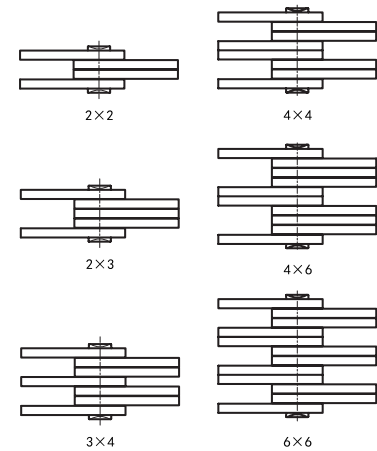


| ISO 链号        | ANSI 链号        | 节距      | 板数组合<br>Plate lacing |   | 内链板高度           | 链板厚度            | 销轴直径            | 销轴长度           | 抗拉强度                      | 平均抗拉强度                   | 每米重量             |
|---------------|----------------|---------|----------------------|---|-----------------|-----------------|-----------------|----------------|---------------------------|--------------------------|------------------|
|               |                | Pitch   |                      |   | Plate depth     | Plate thickness | Pin diameter    | Pin length     | Ultimate tensile strength | Average tensile strength | Weight per meter |
| ISO Chain No. | ANSI Chain No. | P<br>mm |                      |   | h2<br>max<br>mm | T<br>max<br>mm  | d2<br>max<br>mm | L<br>max<br>mm | Q<br>min<br>KN            | Q <sub>0</sub><br>KN     | q<br>kg/m        |
| LH0822        | BL422          | 12.70   | 2                    | 2 | 12.07           | 2.08            | 5.09            | 11.1           | 22.2                      | 27.6                     | 0.68             |
| LH0823        | BL423          |         | 2                    | 3 |                 |                 |                 | 13.2           | 22.2                      | 27.6                     | 0.84             |
| LH0834        | BL434          |         | 3                    | 4 |                 |                 |                 | 17.4           | 33.4                      | 41.4                     | 1.13             |
| LH0844        | BL444          |         | 4                    | 4 |                 |                 |                 | 19.6           | 44.5                      | 56.0                     | 1.28             |
| LH0846        | BL446          |         | 4                    | 6 |                 |                 |                 | 23.8           | 44.5                      | 56.0                     | 1.65             |
| LH0866        | BL466          | 15.875  | 6                    | 6 | 15.09           | 2.44            | 5.96            | 28.0           | 66.7                      | 82.0                     | 1.96             |
| LH1022        | BL522          |         | 2                    | 2 |                 |                 |                 | 12.9           | 33.4                      | 43.2                     | 1.07             |
| LH1023        | BL523          |         | 2                    | 3 |                 |                 |                 | 15.4           | 33.4                      | 43.2                     | 1.27             |
| LH1034        | BL534          |         | 3                    | 4 |                 |                 |                 | 20.4           | 48.9                      | 65.6                     | 1.69             |
| LH1044        | BL544          |         | 4                    | 4 |                 |                 |                 | 22.8           | 66.7                      | 84.5                     | 1.89             |
| LH1046        | BL546          | 19.05   | 4                    | 6 | 18.11           | 3.30            | 7.94            | 27.7           | 66.7                      | 84.5                     | 2.40             |
| LH1066        | BL566          |         | 6                    | 6 |                 |                 |                 | 32.7           | 100.1                     | 126.0                    | 2.80             |
| LH1222        | BL622          |         | 2                    | 2 |                 |                 |                 | 17.4           | 48.9                      | 64.0                     | 1.68             |
| LH1223        | BL623          |         | 2                    | 3 |                 |                 |                 | 20.8           | 48.9                      | 64.0                     | 2.04             |
| LH1234        | BL634          |         | 3                    | 4 |                 |                 |                 | 27.5           | 75.6                      | 102.8                    | 2.83             |
| LH1244        | BL644          | 25.40   | 4                    | 4 | 24.13           | 4.09            | 9.54            | 30.8           | 97.9                      | 121.0                    | 3.18             |
| LH1246        | BL646          |         | 4                    | 6 |                 |                 |                 | 37.5           | 97.9                      | 121.0                    | 4.01             |
| LH1266        | BL666          |         | 6                    | 6 |                 |                 |                 | 44.2           | 146.8                     | 192.0                    | 4.73             |
| LH1622        | BL822          |         | 2                    | 2 |                 |                 |                 | 21.4           | 84.5                      | 110.0                    | 2.59             |
| LH1623        | BL823          |         | 2                    | 3 |                 |                 |                 | 25.5           | 84.5                      | 110.0                    | 3.20             |
| LH1634        | BL834          |         | 3                    | 4 |                 |                 |                 | 33.8           | 129.0                     | 170.0                    | 4.44             |
| LH1644        | BL844          |         | 4                    | 4 |                 |                 |                 | 37.9           | 169.0                     | 215.0                    | 5.04             |
| LH1646        | BL846          |         | 4                    | 6 |                 |                 |                 | 46.2           | 169.0                     | 215.0                    | 6.32             |
| LH1666        | BL866          |         | 6                    | 6 |                 |                 |                 | 54.5           | 253.6                     | 325.0                    | 7.54             |

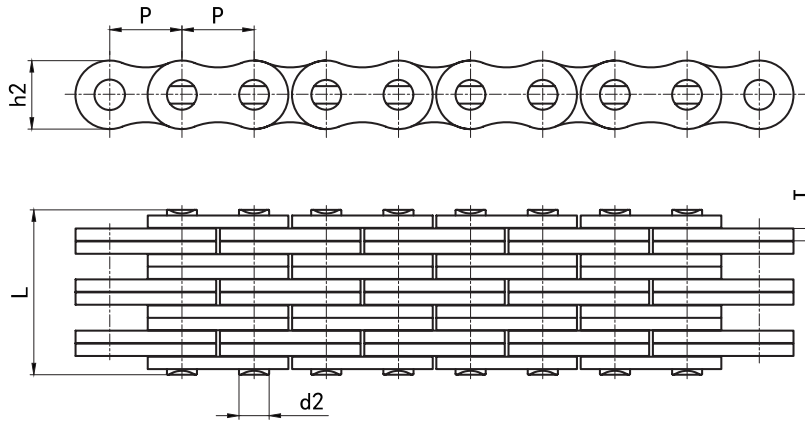

| ISO 链号        | ANSI 链号        | 节距      | 板数组合<br>Plate lacing |   | 内链板高度           | 链板厚度            | 销轴直径            | 销轴长度           | 抗拉强度                      | 平均抗拉强度                   | 每米重量             |
|---------------|----------------|---------|----------------------|---|-----------------|-----------------|-----------------|----------------|---------------------------|--------------------------|------------------|
|               |                | Pitch   |                      |   | Plate depth     | Plate thickness | Pin diameter    | Pin length     | Ultimate tensile strength | Average tensile strength | Weight per meter |
| ISO Chain No. | ANSI Chain No. | P<br>mm |                      |   | h2<br>max<br>mm | T<br>max<br>mm  | d2<br>max<br>mm | L<br>max<br>mm | Q<br>min<br>KN            | Q <sub>0</sub><br>KN     | q<br>kg/m        |
| LH2022        | BL1022         | 31.75   | 2                    | 2 | 30.18           | 4.90            | 11.11           | 25.4           | 115.6                     | 152.0                    | 3.76             |
| LH2023        | BL1023         |         | 2                    | 3 |                 |                 |                 | 30.4           | 115.6                     | 152.0                    | 4.69             |
| LH2034        | BL1034         |         | 3                    | 4 |                 |                 |                 | 40.3           | 182.4                     | 232.0                    | 6.55             |
| LH2044        | BL1044         |         | 4                    | 4 |                 |                 |                 | 45.2           | 231.3                     | 292.0                    | 7.48             |
| LH2046        | BL1046         | 38.10   | 4                    | 6 | 36.2            | 5.77            | 12.71           | 55.1           | 231.3                     | 292.0                    | 9.29             |
| LH2066        | BL1066         |         | 6                    | 6 |                 |                 |                 | 65.0           | 347.0                     | 432.0                    | 11.16            |
| LH2422        | BL1222         |         | 2                    | 2 |                 |                 |                 | 29.7           | 151.2                     | 192.0                    | 4.83             |
| LH2423        | BL1223         |         | 2                    | 3 |                 |                 |                 | 35.5           | 151.2                     | 192.0                    | 6.54             |
| LH2434        | BL1234         | 44.45   | 3                    | 4 | 42.24           | 6.60            | 14.29           | 47.1           | 244.6                     | 316.0                    | 9.10             |
| LH2444        | BL1244         |         | 4                    | 4 |                 |                 |                 | 52.9           | 302.5                     | 383.0                    | 10.39            |
| LH2446        | BL1246         |         | 4                    | 6 |                 |                 |                 | 64.6           | 302.5                     | 383.0                    | 12.01            |
| LH2466        | BL1266         |         | 6                    | 6 |                 |                 |                 | 76.2           | 453.7                     | 545.0                    | 14.58            |
| LH2822        | BL1422         | 50.80   | 2                    | 2 | 48.26           | 7.52            | 17.46           | 33.6           | 191.3                     | 227.0                    | 7.31             |
| LH2823        | BL1423         |         | 2                    | 3 |                 |                 |                 | 40.2           | 191.3                     | 227.0                    | 9.06             |
| LH2834        | BL1434         |         | 3                    | 4 |                 |                 |                 | 53.4           | 315.8                     | 373.0                    | 11.32            |
| LH2844        | BL1444         |         | 4                    | 4 |                 |                 |                 | 60.0           | 382.6                     | 452.0                    | 12.96            |
| LH2846        | BL1446         | 58.00   | 4                    | 6 | 50.80           | 8.50            | 19.05           | 73.2           | 382.6                     | 452.0                    | 18.00            |
| LH2866        | BL1466         |         | 6                    | 6 |                 |                 |                 | 86.4           | 578.3                     | 684.0                    | 22.51            |
| LH3222        | BL1622         |         | 2                    | 2 |                 |                 |                 | 40.0           | 289.1                     | 343.0                    | 9.84             |
| LH3223        | BL1623         |         | 2                    | 3 |                 |                 |                 | 46.6           | 289.1                     | 343.0                    | 12.16            |
| LH3234        | BL1634         | 63.50   | 3                    | 4 | 54.00           | 9.50            | 21.00           | 61.8           | 440.4                     | 522.0                    | 16.95            |
| LH3244        | BL1644         |         | 4                    | 4 |                 |                 |                 | 69.3           | 578.3                     | 682.0                    | 18.97            |
| LH3246        | BL1646         |         | 4                    | 6 |                 |                 |                 | 84.5           | 578.3                     | 682.0                    | 24.09            |
| LH3266        | BL1666         |         | 6                    | 6 |                 |                 |                 | 100.0          | 867.4                     | 1000.0                   | 28.73            |

## 轻型板式链条 Leaf Chains (Series LL)

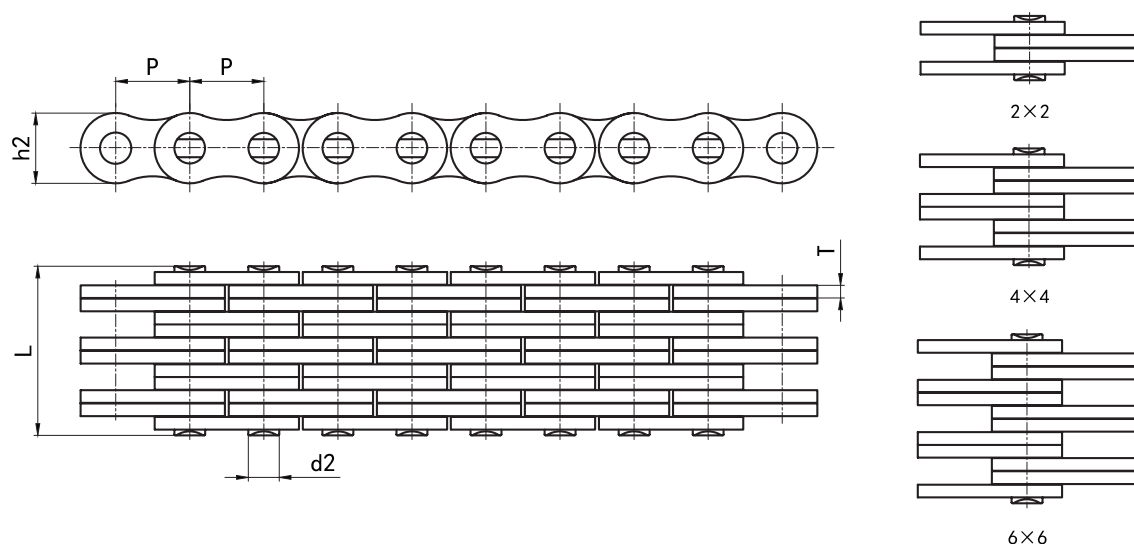

| ISO 链号        | 节距     | 板数组合<br>Plate lacing |   | 内链板高度       | 链板厚度            | 销轴直径         | 销轴长度       | 抗拉强度                      | 平均抗拉强度                   | 每米重量             |
|---------------|--------|----------------------|---|-------------|-----------------|--------------|------------|---------------------------|--------------------------|------------------|
| ISO Chain No. | Pitch  |                      |   | Plate depth | Plate thickness | Pin diameter | Pin length | Ultimate tensile strength | Average tensile strength | Weight per meter |
|               | P      |                      |   | h2 max      | T max           | d2 max       | L max      | Q min                     | Q <sub>0</sub>           | q                |
|               | mm     |                      |   | mm          | mm              | mm           | mm         | KN                        | kN                       | kg/m             |
| LL0822        | 12.7   | 2                    | 2 | 10.92       | 1.55            | 4.45         | 8.5        | 18.0                      | 20.5                     | 0.41             |
| LL0844        |        | 4                    | 4 |             |                 |              | 14.6       | 36.0                      | 40.7                     | 0.84             |
| LL0866        |        | 6                    | 6 |             |                 |              | 20.7       | 54.0                      | 60.0                     | 1.20             |
| LL1022        |        | 2                    | 2 |             |                 |              | 9.3        | 22.0                      | 25.6                     | 0.59             |
| LL1044        | 15.875 | 4                    | 4 | 16.13       | 1.90            | 5.72         | 16.1       | 44.0                      | 51.2                     | 1.10             |
| LL1066        |        | 6                    | 6 |             |                 |              | 22.9       | 66.0                      | 76.3                     | 1.57             |
| LL1222        | 19.05  | 2                    | 2 |             |                 |              | 10.7       | 29.0                      | 33.5                     | 0.71             |
| LL1244        |        | 4                    | 4 |             |                 |              | 18.5       | 58.0                      | 66.5                     | 1.45             |
| LL1266        |        | 6                    | 6 |             |                 |              | 26.3       | 87.0                      | 99.7                     | 2.12             |
| LL1622        | 25.40  | 2                    | 2 | 26.42       | 3.70            | 10.19        | 17.2       | 60.0                      | 66.7                     | 1.52             |
| LL1644        |        | 4                    | 4 |             |                 |              | 30.2       | 120.0                     | 141.0                    | 2.90             |
| LL1666        |        | 6                    | 6 |             |                 |              | 43.2       | 180.0                     | 209.0                    | 4.40             |
| LL2022        | 31.75  | 2                    | 2 |             |                 |              | 20.1       | 95.0                      | 109.5                    | 2.33             |
| LL2044        |        | 4                    | 4 |             |                 |              | 35.1       | 190.0                     | 218.6                    | 4.40             |
| LL2066        |        | 6                    | 6 |             |                 |              | 50.1       | 285.0                     | 324.6                    | 6.79             |
| LL2422        |        | 2                    | 2 | 37.08       | 6.45            | 15.90        | 28.4       | 170.0                     | 195.5                    | 4.47             |
| LL2444        | 38.10  | 4                    | 4 |             |                 |              | 49.4       | 340.0                     | 380.8                    | 8.25             |
| LL2466        |        | 6                    | 6 |             |                 |              | 70.4       | 510.0                     | 572.0                    | 12.52            |
| LL2822        | 44.45  | 2                    | 2 |             |                 |              | 34.0       | 200.0                     | 225.0                    | 5.10             |
| LL2844        |        | 4                    | 4 |             |                 |              | 60.0       | 400.0                     | 450.0                    | 9.90             |
| LL2866        |        | 6                    | 6 |             |                 |              | 86.0       | 600.0                     | 672.5                    | 14.60            |
| LL3222        | 50.80  | 2                    | 2 | 37.08       | 6.45            | 15.90        | 35.0       | 260.0                     | 292.0                    | 6.20             |
| LL3244        |        | 4                    | 4 |             |                 |              | 61.0       | 520.0                     | 582.5                    | 12.30            |
| LL3266        |        | 6                    | 6 |             |                 |              | 87.0       | 780.0                     | 875.0                    | 18.30            |